

AEC-6840

Fanless Embedded Controller

Intel® ULV Celeron®

400/650MHz EBCA CPU

With Dual Ethernet,

4 COMs, DIO,

CompactFlash™

Copyright Notice

This document is copyrighted, 2005. All rights are reserved. The original manufacturer reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of the original manufacturer. Information provided in this manual is intended to be accurate and reliable. However, the original manufacturer assumes no responsibility for its use, or for any infringements upon the rights of third parties that may result from its use.

The material in this document is for product information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, AAEON assumes no liabilities resulting from errors or omissions in this document, or from the use of the information contained herein.

AAEON reserves the right to make changes in the product design without notice to its users.

Acknowledgments

All other products' name or trademarks are properties of their respective owners.

- Award is a trademark of Award Software International, Inc.
- CompactFlash™ is a trademark of the Compact Flash Association.
- VIA Eden™ is a trademark of VIA Technology Inc.
- Microsoft Windows® is a registered trademark of Microsoft Corp.
- PC/AT, PS/2, and VGA are trademarks of International Business Machines Corporation.

Packing List

Before you begin operating your PC, please make sure that the following materials have been shipped:

- 1 AEC-6840 Embedded Controller
- 1 Keyboard & mouse cable
- 1 Phoenix Power Connector
- 2 Wall Mount Bracket
- 1 Phoenix DIO Connector
- 1 Screw Package
- 1 CD-ROM for manual (in PDF format) and drivers

If any of these items should be missing or damaged, please contact your distributor or sales representative immediately.

Safety & Warranty

1. Read these safety instructions carefully.
2. Keep this user's manual for later reference.
3. Disconnect this equipment from any AC outlet before cleaning. Do not use liquid or spray detergents for cleaning. Use a damp cloth.
4. For pluggable equipment, the power outlet must be installed near the equipment and must be easily accessible.
5. Keep this equipment away from humidity.
6. Put this equipment on a reliable surface during installation. Dropping it or letting it fall could cause damage.
7. The openings on the enclosure are for air convection. Protect the equipment from overheating. **DO NOT COVER THE OPENINGS.**
8. Make sure the voltage of the power source is correct before connecting the equipment to the power outlet.
9. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
10. All cautions and warnings on the equipment should be noted.
11. If the equipment is not used for a long time, disconnect it from the power source to avoid damage by transient over-voltage.
12. Never pour any liquid into an opening. This could cause fire or electrical shock.
13. Never open the equipment. For safety reasons, only qualified service personnel should open the equipment.
14. If any of the following situations arises, get the equipment checked

by service personnel:

- a. The power cord or plug is damaged.
 - b. Liquid has penetrated into the equipment.
 - c. The equipment has been exposed to moisture.
 - d. The equipment does not work well, or you cannot get it to work according to the users manual.
 - e. The equipment has been dropped and damaged.
 - f. The equipment has obvious signs of breakage.
15. DO NOT LEAVE THIS EQUIPMENT IN AN ENVIRONMENT WHERE THE STORAGE TEMPERATURE IS BELOW -20° C(-4°F) OR ABOVE 60° C (140° F). IT MAY DAMAGE THE EQUIPMENT.

FCC Safety

Warning!



This device complies with Part 15 FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference,
- and (2) this device must accept any interference received including interference that may cause undesired operation.

Caution:

It may cause danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions.

Contents

Copyright Notice.....	2
Acknowledgments	3
Packing List	4
Safety & Warranty.....	5
FCC Safety	6
Chapter 1 General Information	9
1.1 Introduction	10
1.2 Feature	11
1.3 Specification	12
Chapter 2 Hardware Installation	15
2.1 Dimension	16
2.2 HDD Module Installation	17
2.3 SDRAM Installation	22
2.4 COM2 RS-232/422/485 Setting	24
2.5 Power Linkage Installation	25
2.6 Wall-mount Installation.....	27
2.7 Din Rail Installation.....	28
2.8 COM2 RS-232/422/485 Serial Port Connector	29
2.9 COM1/3/4 RS-232 Serial Port Connector	29
Chapter 3 Award BIOS Setup.....	30
3.1 System test and initialization	31

3.2 Award BIOS Setup	33
3.3 Main Menu	35
3.4 Advanced BIOS Features.....	37
3.5 Advanced Chipset Features	38
3.6 Integrated Peripherals	40
3.7 Power Management Setup.....	43
3.8 PnP/PCI configuration	45
3.9 PC Health Status.....	46
3.10 Clk/Voltage control	47
3.11 Load Optimized Defaults	48
3.12 Set Password	49
3.13 Save & Exit Setup	50
3.14 Exit without saving.....	51
Chapter 4 Driver Installation	52
4.1 Installation procedure	54
Appendix A Programming the	
Watchdog Timer	56
A.1 Programming	57
A.2 W83697UF Watchdog Timer Initial Program.....	61

Chapter

1

General Information

1.1 Introduction

AEC-6840 is the advanced upgraded version of AEC-6810. The target markets are industrial automation such as applications in factory management, building entrance guard and transportation system. AAEON primarily focuses AEC-6840 on environmental monitoring system.

Intel® ULV Celeron® chipset with low power consumption and high performance is widely acceptable and dependable in the market. USB 2.0, four Serial ports and Digital I/O communicates with diverse devices with high transferring rate. Furthermore, an optional Gigabit LAN port is a leading-edge design and also an innovation for communication in IPC industry. AEC-6840 plays a role as connecting all subsystems. AAEON not only enhances your competitive value but also gives you the excellent solution in the future.

1.2 Feature

- Fan-less System
- Onboard Intel® ULV Celeron® 400/650MHz EBGA processor
- Optional Dual LAN(Gigabit LAN)
- 4 serial ports / Digital IO / USB2.0
- Embedded OS WinCE.net 4.2 porting ready for application
- Supports CompactFlash™ Memory and lockable mechanism
- Anti-vibration up to 5 g rms / Anti-shock up to 100gn

1.3 Specification

System


- CPU: Intel® ULV Celeron® 400/650MHz
EBGA CPU
- Construction: Rugged Aluminum Alloy Chassis
- System Memory: DDR RAM SODIMM x 1, Max.
512MB
- VGA: D-sub 15 VGA Connector
- Keyboard/Mouse: PS/2 Keyboard & Mouse
- Ethernet: 10/100Base-T Ethernet RJ-45
connector x 1
Optional 2nd LAN(10/100 or Gigabit)
- SSD: Type II CompactFlash™ slot
- Hard Disk Storage: Optional 2.5" Slim HDD Module
- Serial Port: 3 x RS-232, 1 x RS-232/422/485
- DIO: 3 in / 3 out
- USB: 2 USB 2.0 Ports
- Watchdog Timer: Generate a time-out system reset
- Power Supply: DC Input: 9V_{DC}~30V_{DC}
AC Input: External Power Adapter
(Optional)
- System Control: Power on / off switch x 1
Reset button x 1
- Indicator: Power LED x 1
HDD active LED x 1

- OS Support: Windows® 2000 / XP, Windows® CE, Windows® XP Embedded


Mechanical and Environmental

- Construction: Aluminum Alloy chassis
- Color: Dark Blue
- Mounting: Wall-mount (Default), Din Rail
- Dimension: 8.35" (W) x 2.53" (H) x 4.21" (D)
212.15mm x 64.2mm x 107mm
- Net Weight: 4.75lb (2.16kg)
- Gross Weight: 8.36lb (3.8kg)
- Operation Temperature: 5°F ~ 140°F (-15°C ~ 60°C)
- Operation Humidity: 5~95%@40C, non-condensing
- Vibration: 5 g rms / 5~500Hz / random
operation (Without HDD Module)
1 g / 5~500Hz / random operation
(With HDD Module)
- Shock: 100g peak acceleration (11 msec.
duration)
- EMC: CE/FCC Class A

Front Side

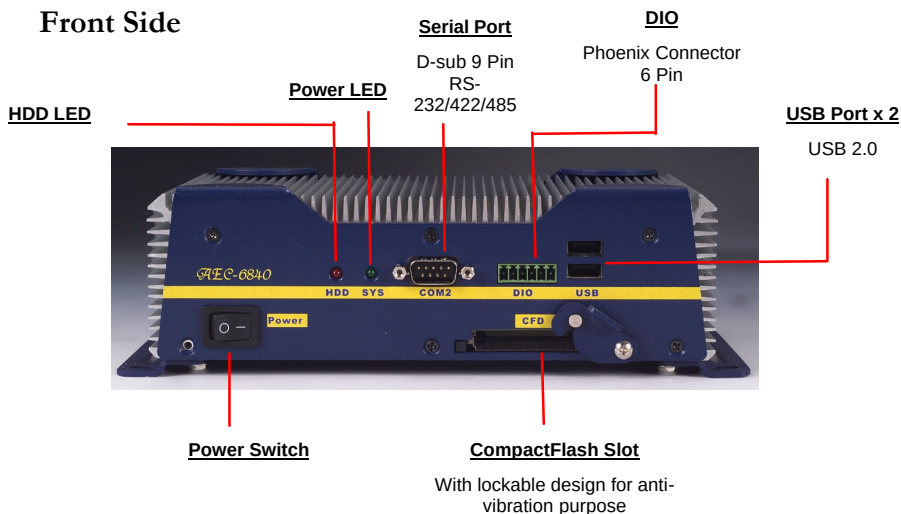

Rear Side

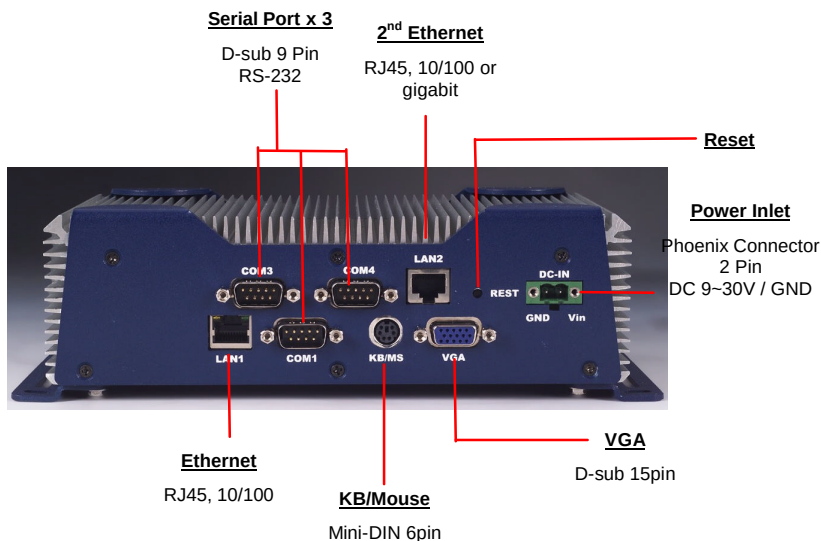


Chapter

2




Hardware Installation

2.1 Dimension

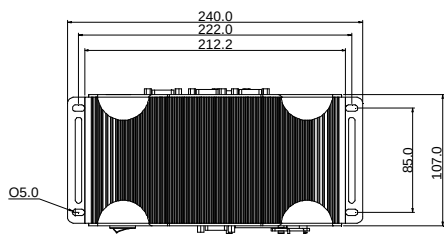

AEC-6840



Units:mm





2.2 HDD Module Installation

Cable Insertion

Step 1: Open the HDD cover by loosening the screws on the bottom of the chassis.

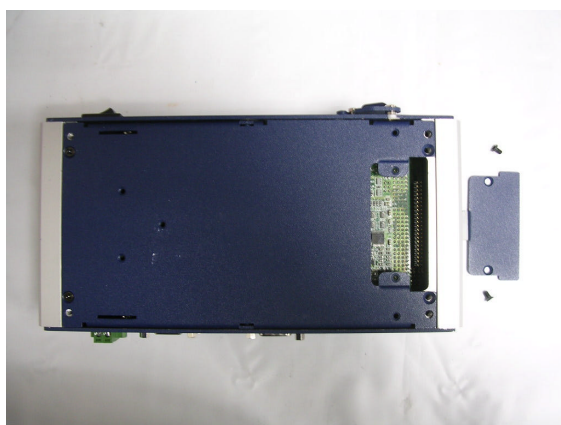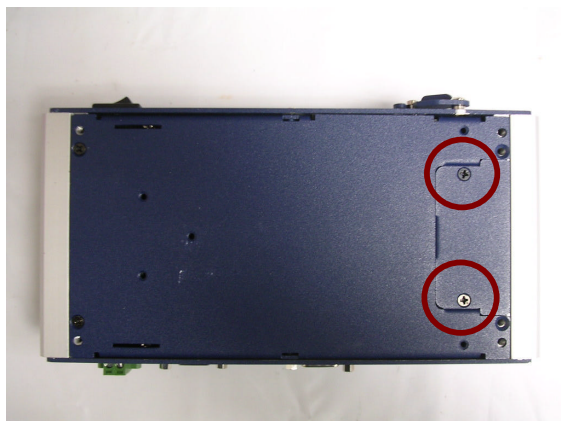


Step 2: Insert the Cable to the bottom of the chassis as the illustration below.

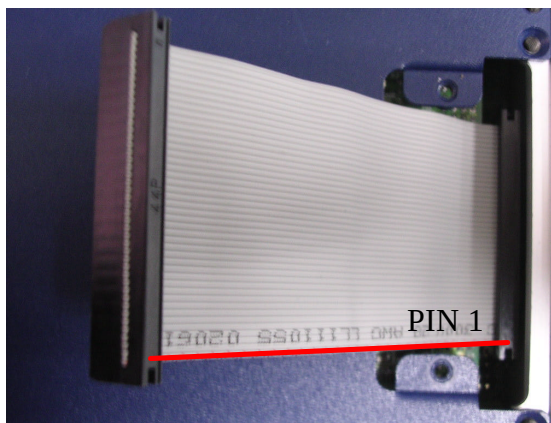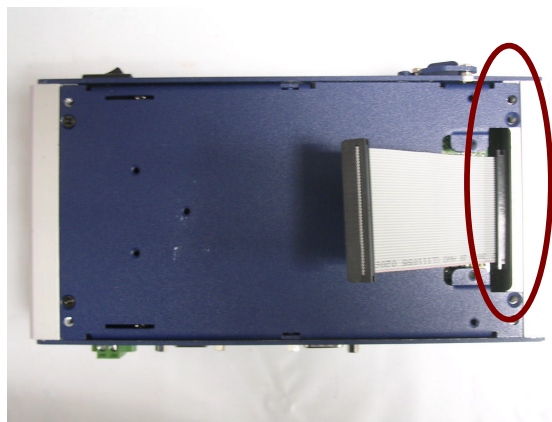


HDD Kit Combination

Get the HDD and bracket ready.

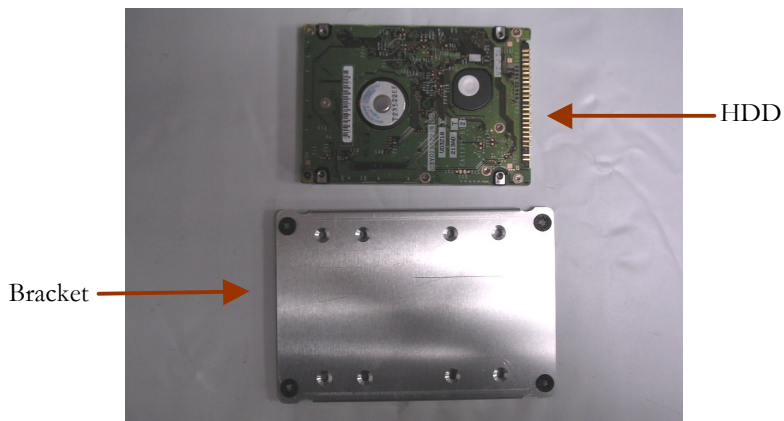


Step 1: Stack the HDD and bracket. Fasten HDD and bracket with the screws.

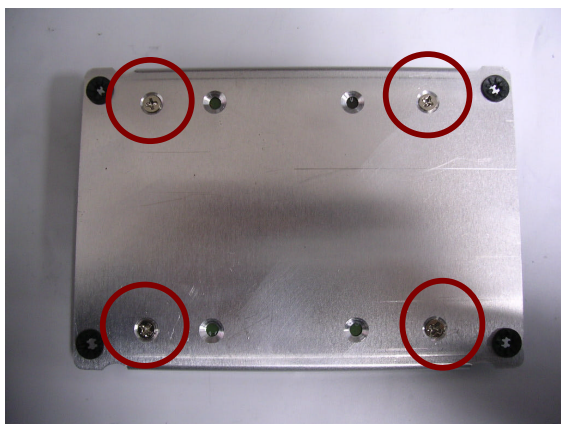


Step 2: Fasten the HDD module into the HDD kit house.




Step 3: Insert the other side of the cable to the HDD module.

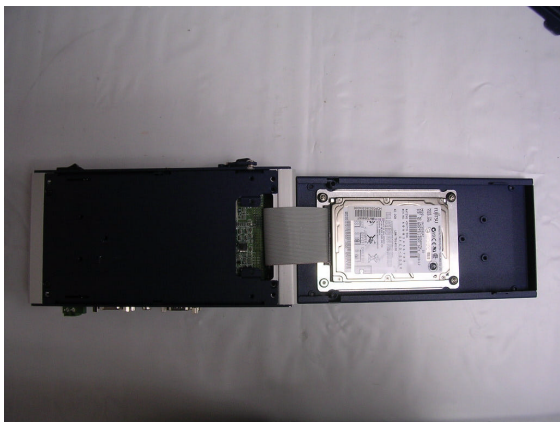

Step 4: Combine the HDD kit house with the chassis and push as the illustration shown below.

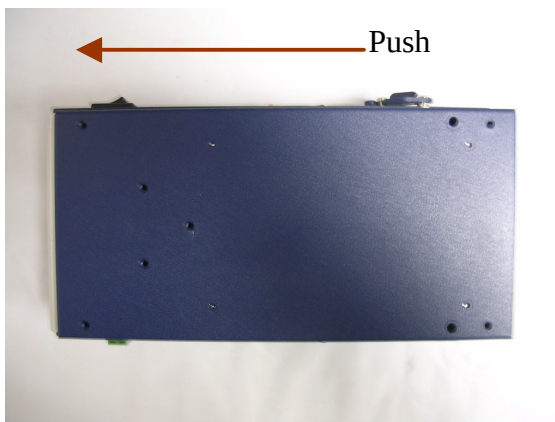


Step 5: Lock with the screws.

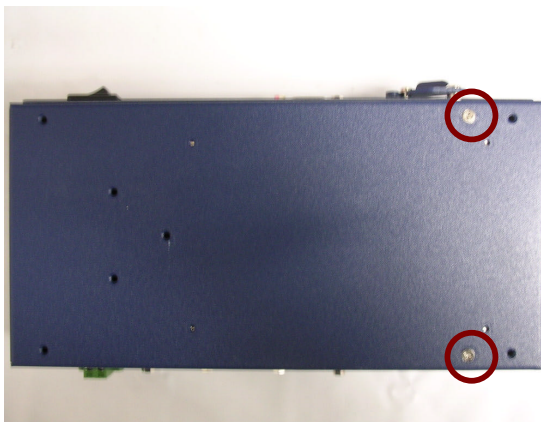


2.3 SDRAM Installation

Step 1: Screw the lid off the chassis.

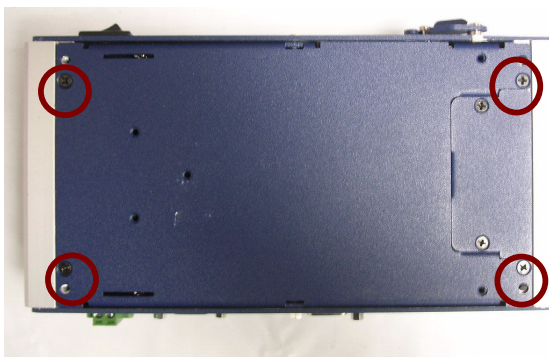

Step 2: Remove the lid after you screw the lid off the chassis and insert the DDR SDRAM SODIMM module into the slot.

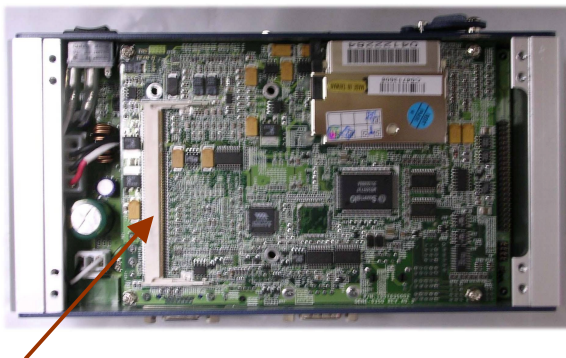

SDRAM
SODIMM
module


2.4 COM2 RS-232/422/485 Setting

RS-232/422/485 Selection (JP2 & JP3)

The following table provides the user to set up COM2 port.

JP2	Function
1-2, 4-5, 7-8, 10-11	RS-232 (Default)
2-3, 5-6, 8-9, 11-12	RS-422
2-3, 5-6, 8-9, 11-12	RS-485


JP3	Function
1-2	RS-232 (Default)
3-4	RS-422
5-6	RS-485

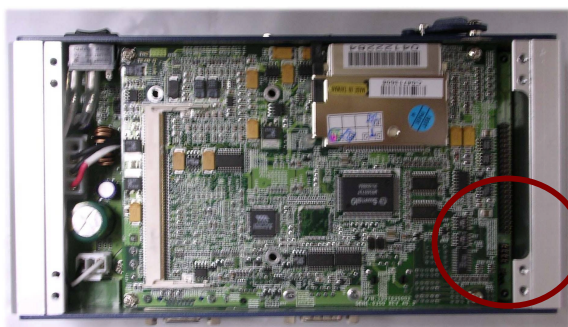


Magnification

2.5 Power Linkage Installation

Step 1: Get the cable and connector ready

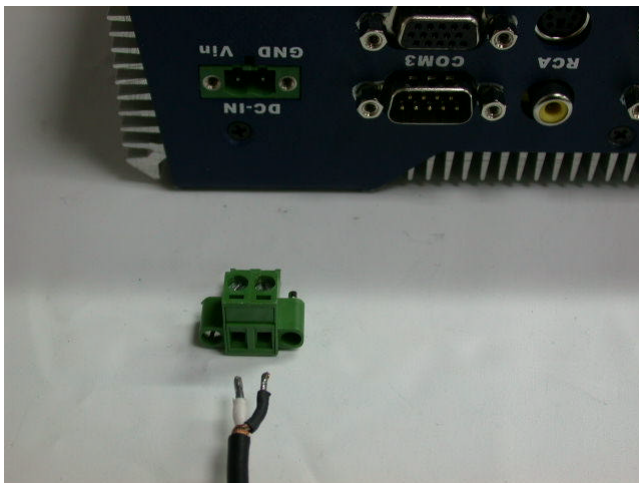


Step2: Fix the connector to the cable with the screws.

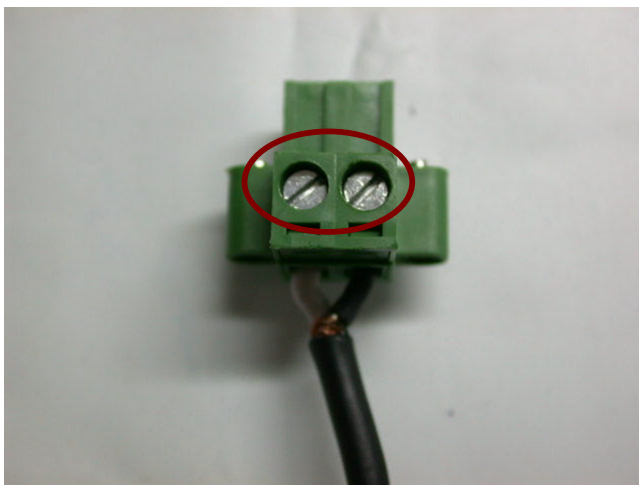

Step3: Insert the power cable in.



Step 4: Screw the power cable into the chassis.

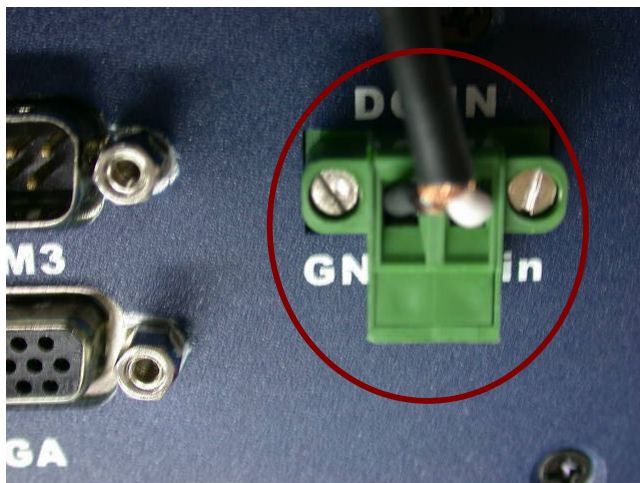


Notice:

*Please make sure that pin assignment of **Power and Ground** on the accurate location.*


2.6 Wall-mount Installation

Fasten the brackets with the screws.

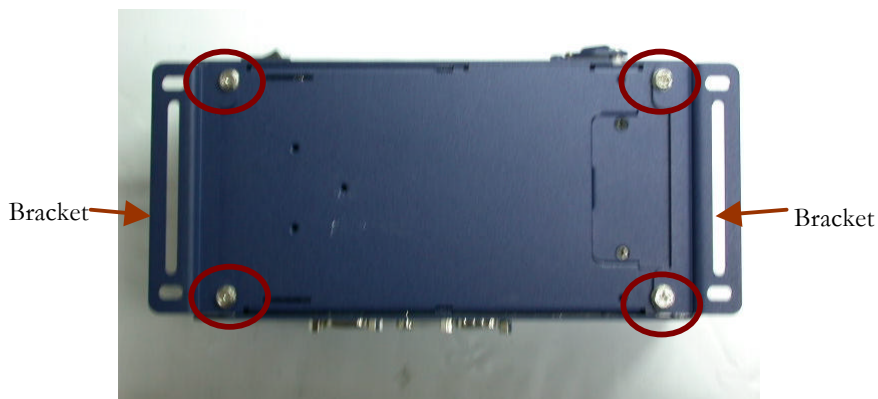


2.7 Din Rail Installation

Step 1: Fix the Din Rail kit with the screws on the chassis as the illustration shown.

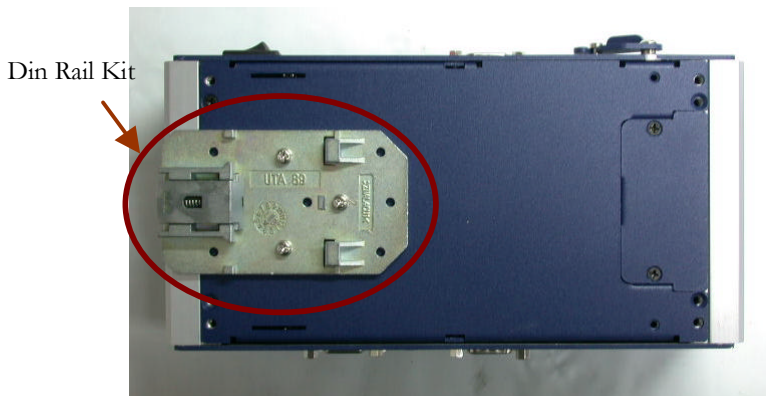


Step 2: Press the Din Rail on the Din Rail kit to fix it.

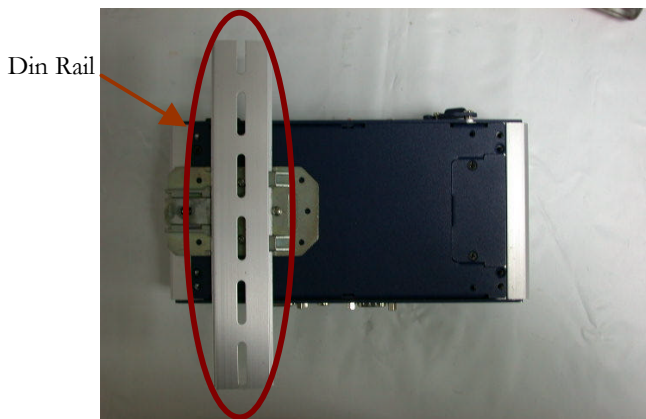

2.8 COM2 RS-232/422/485 Serial Port Connector

Different devices implement the RS-232/422/485 standard in different ways.

If you are having problems with a serial device, be sure to check the pin assignments below for the connector.



Pin	Signal	Pin	Signal
1	DCD (422TXD-/485DATA-)	2	RXD (422RXD+)
3	TXD (422TXD+/485DATA+)	4	DTR (422RXD-)
5	GND	6	DSR
7	RTS	8	CTS
9	RI	10	N.C.

2.9 COM1/3/4 RS-232 Serial Port Connector

Pin	Signal	Pin	Signal
1	DCD	2	RXD
3	TXD	4	DTR
5	GND	6	DSR
7	RTS	8	CTS
9	RI	10	N.C.

Chapter

3

Award BIOS Setup

3.1 System test and initialization

These routines test and initialize board hardware. If the routines encounter an error during the tests, you will either hear a few short beeps or see an error message on the screen. There are two kinds of errors: fatal and non-fatal. The system can usually continue the boot up sequence with non-fatal errors. Non-fatal error messages usually appear on the screen along with the following instructions:

Press <F1> to RESUME

Write down the message and press the F1 key to continue the boot up sequence.

System configuration verification

These routines check the current system configuration against the values stored in the CMOS memory. If they do not match, the program outputs an error message. You will then need to run the BIOS setup program to set the configuration information in memory.

There are three situations in which you will need to change the CMOS settings:

1. You are starting your system for the first time
2. You have changed the hardware attached to your system
3. The CMOS memory has lost power and the configuration information has been erased.

The AEC-6840 CMOS memory has an integral lithium battery backup for data retention. However, you will need to replace the complete unit when it finally runs down.

3.2 Award BIOS Setup

Awards BIOS ROM has a built-in Setup program that allows users to modify the basic system configuration. This type of information is stored in battery-backed CMOS RAM so that it retains the Setup information when the power is turned off.

Entering setup

Power on the computer and press <Del> immediately. This will allow you to enter Setup.

Main Menu

Use this menu for basic system configuration. (Date, time, IDE, etc.)

Advanced BIOS Features

Allow you to choose the VIRUS warning feature for IDE Hard Disk boot sector protection. If this function is enabled and someone attempt to write data into this area, BIOS will show a warning message on screen and alarm beep.

Advanced Chipset Features

DRAM timings, AGP functions etc.

Integrated Peripherals

Use this menu to specify your settings for integrated peripherals. (Onchip IDE device, Onchip PCI device, Super IO device, mouse etc.)

Power Management Setup

Use this menu to specify your settings for power management.

PnP/PCI Configurations

This entry appears if your system supports PnP/PCI.

PC Health Status

This menu shows you the status of PC.

Clk/Voltage Control

This menu shows you the display of Clock and Spread Spectrum Control.

Load Optimized Defaults

Use this menu to load the BIOS default values that are factory settings for optimal performance system operations. While AWARD has designated the custom BIOS to maximize performance, the factory has the right to change these defaults to meet their needs.

Set Password

Change / Set / Disable password.

Save and Exit Setup


Save the changes you've made to CMOS and exit setup.

Exit Without Saving


Abandon all CMOS value changes and exit setup.

3.3 Main Menu

When you choose Main Menu, the screen shown below is displayed. This Main Menu allows users to configure system components such as date, time, hard disk drive, floppy drive and display. Once a field is highlighted, on-line help information is displayed in the right box of the Menu screen.

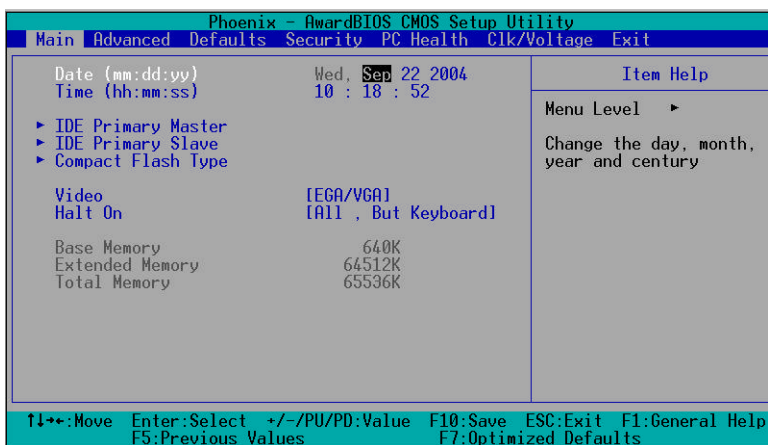

➤ IDE Primary Master

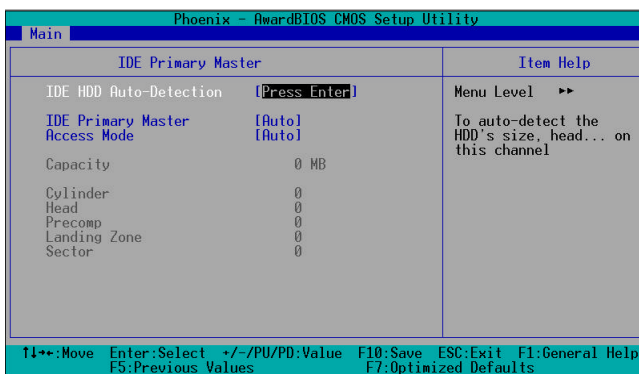

➤ IDE Primary Slave



Phoenix - AwardBIOS CMOS Setup Utility		
Main		
IDE Primary Slave		Item Help
IDE HDD Auto-Detection	[Press Enter]	Menu Level >>
IDE Primary Slave Access Mode	[Auto] [Auto]	To auto-detect the HDD's size, head... on this channel
Capacity	0 MB	
Cylinder	0	
Head	0	
Precomp	0	
Landing Zone	0	
Sector	0	
↑↓:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F7:Optimized Defaults		

➤ CompactFlash Type

Phoenix - AwardBIOS CMOS Setup Utility		
Main		
Compact Flash Type		Item Help
IDE HDD Auto-Detection	[Press Enter]	Menu Level >>
Compact Flash Type Access Mode	[Auto] [Auto]	To auto-detect the HDD's size, head... on this channel
Capacity	0 MB	
Cylinder	0	
Head	0	
Precomp	0	
Landing Zone	0	
Sector	0	
↑↓:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F7:Optimized Defaults		

3.4 Advanced BIOS Features

By choosing Advanced BIOS Features, the screen below is displayed. This sample screen contains the manufacturer's default values for the AEC-6840.

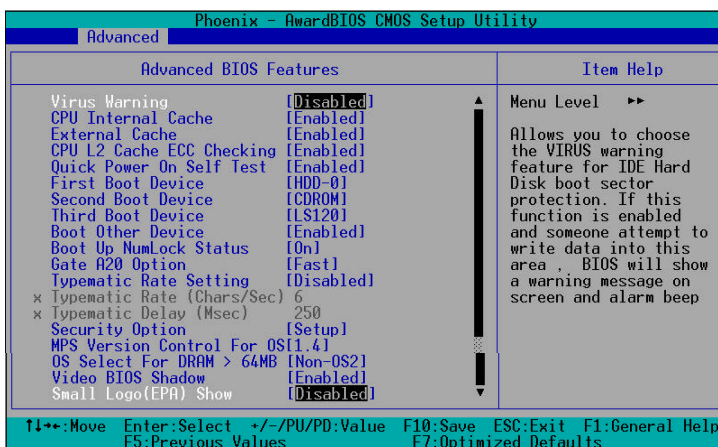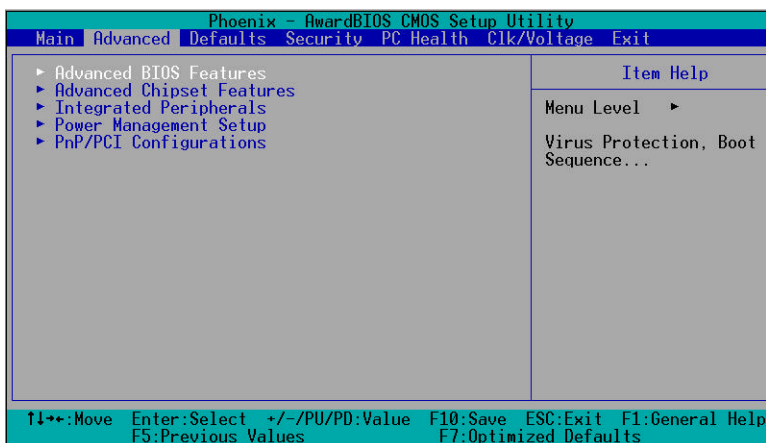

3.5 Advanced Chipset Features

By choosing the Advanced Chipset Features, the screen below is displayed. This sample screen contains the manufacturer's default values for the AEC-6840.

Phoenix - AwardBIOS CMOS Setup Utility	
Advanced	
Advanced Chipset Features	Item Help
▶ DRAM Clock/Drive Control	Menu Level ▶▶
▶ AGP & P2P Bridge Control	
PCI Delay Transaction [Disabled]	
System BIOS Cacheable [Enabled]	
Video RAM Cacheable [Enabled]	
VGA Share Memory Size [32M]	
↑↓↔:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F7:Optimized Defaults	

➤ **DRAM Clock/Drive Control**

Phoenix - AwardBIOS CMOS Setup Utility	
Advanced	
DRAM Clock/Drive Control	Item Help
Current FSB Frequency	Menu Level ▶▶▶
Current DRAM Frequency	
DRAM Clock [Auto]	
DRAM Timing [Auto]	
x DRAM CAS Latency 2.5	
x Bank Interleave Disabled	
x Precharge to Active(Trp) 3T	
x Active to Precharge(Tras) 6T	
x Active to CMD(Trcd) 3T	
DRAM Command Rate [2T Command]	
F10: Save ESC: Exit F1: General Help	
F5: Previous Values F7: Optimized Defaults	

➤ **AGP & P2P Bridge Control**

Phoenix - AwardBIOS CMOS Setup Utility	
Advanced	
AGP & P2P Bridge Control	Item Help
AGP Aperture Size [64M]	Menu Level >>>

3.6 Integrated Peripherals

By choosing the Integrated, the screen below is displayed. This sample screen contains the manufacturer's default values for the AEC-6840.

Phoenix - AwardBIOS CMOS Setup Utility	
Advanced	
Integrated Peripherals	Item Help
▶ OnChip IDE Device ▶ OnChip PCI Device ▶ SuperIO Device ▶ Digital I/O Setting	Menu Level ▶▶
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F7:Optimized Defaults	

➤ OnChip IDE Device

Phoenix - AwardBIOS CMOS Setup Utility	
Advanced	
OnChip IDE Device	Item Help
OnChip IDE Channel [Enabled] IDE Prefetch Mode [Enabled] IDE Channel Master PIO [Auto] IDE Channel Slave PIO [Auto] Compact Flash PIO [Auto] IDE Channel Master UDMA [UDMA33] IDE Channel Slave UDMA [UDMA33] Compact Flash UDMA [Auto] IDE HDD Block Mode [Enabled]	Menu Level ▶▶▶
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F7:Optimized Defaults	

➤ **OnChip PCI Device**

Phoenix - AwardBIOS CMOS Setup Utility		
Advanced		
OnChip PCI Device		Item Help
Onboard Sound Device	[Enabled]	Menu Level >>>
Onboard Lan Device	[Enabled]	
Boot ROM function	[Disabled]	
OnChip USB Controller	[All Enabled]	
OnChip EHCI Controller	[Enabled]	
USB Keyboard Support	[Enabled]	
USB Mouse Support	[Enabled]	
F10:Save F5:Previous Values F7:Optimized Defaults F1:General Help F12:Exit		

➤ **Super IO Device**


Phoenix - AwardBIOS CMOS Setup Utility		
Advanced		
SuperIO Device		Item Help
Onboard Serial Port 1	[3F8/IRQ4]	Menu Level >>>
Onboard Serial Port 2	[2F8/IRQ3]	
Onboard Serial Port 3	[3E8/IRQ11]	
Onboard Serial Port 4	[2E8/IRQ10]	
UART Mode Select	[Normal]	
RxD , TxD Active	[Hi,Lo]	
IR Transmission Delay	[Enabled]	
UR2 Duplex Mode	[Half]	
Use IR Pins	[IR-Rx2Tx2]	
↑↓:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F7:Optimized Defaults		

➤ **Digital IO Setting**

Phoenix - AwardBIOS CMOS Setup Utility		
Advanced		
Digital I/O Setting		Item Help
Digital I/O Port	[280]	Menu Level >>>
Port 1	[Input]	
Port 2	[Input]	
Port 3	[Input]	
Port 4	[Input]	
Port 5	[Output]	
Port 6	[Output]	
Port 7	[Output]	
Port 8	[Output]	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F7:Optimized Defaults		

3.7 Power Management Setup

By choosing the Power Management Setup, the screen below is displayed. This sample screen contains the manufacturer's default values for the AEC-6840.

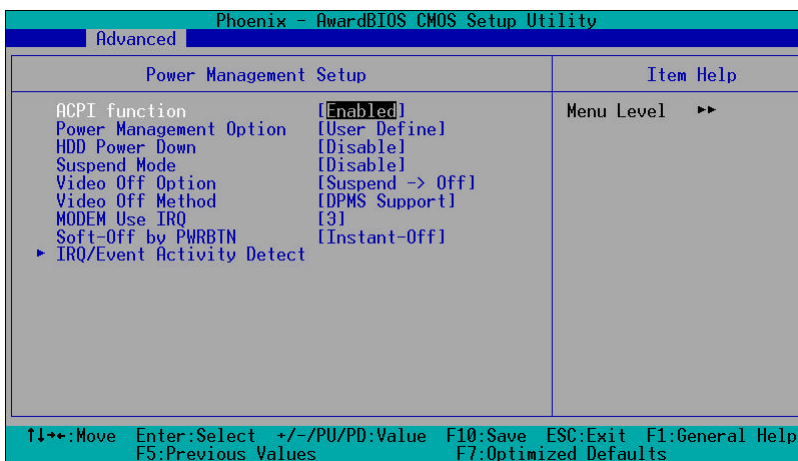

➤ **IRQ/Event Activity Detect**

Phoenix - AwardBIOS CMOS Setup Utility		
Advanced		
IRQ/Event Activity Detect		Item Help
PS2KB Wakeup Select	[Hot key]	Menu Level >>> When Select Password, Please press ENTER key to change Password Max 8 numbers.
PS2KB Wakeup from S3/S4/S5	[Disable]	
Power Button Lock	[Enabled]	
PS2MS Wakeup from S3/S4/S5	[Disable]	
VGA	[OFF]	
LPT & COM	[LPT/COM]	
HDD & FDD	[ON]	
PCI Master	[OFF]	
▶ IRQs Activity Monitoring		
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F7:Optimized Defaults		

➤ **IRQ Activity Monitoring**

Phoenix - AwardBIOS CMOS Setup Utility		
Advanced		
IRQs Activity Monitoring		Item Help
Primary INTR	[ON]	Menu Level >>>>
IRQ3 (COM 2)	[Enabled]	
IRQ4 (COM 1)	[Enabled]	
IRQ5 (LPT 2)	[Enabled]	
IRQ6 (Floppy Disk)	[Enabled]	
IRQ7 (LPT 1)	[Enabled]	
IRQ8 (RTC Alarm)	[Disabled]	
IRQ9 (IRQ2 Redir)	[Disabled]	
IRQ10 (Reserved)	[Disabled]	
IRQ11 (Reserved)	[Disabled]	
IRQ12 (PS/2 Mouse)	[Enabled]	
IRQ13 (Coprocessor)	[Enabled]	
IRQ14 (Hard Disk)	[Enabled]	
IRQ15 (Reserved)	[Disabled]	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F7:Optimized Defaults		

3.8 PnP/PCI configuration


By choosing the PnP/PCI configurations, the screen below is displayed.

This sample screen contains the manufacturer's default values for the AEC-6840.

Phoenix - AwardBIOS CMOS Setup Utility		
Advanced		
PnP/PCI Configurations		Item Help
PNP OS Installed	[No]	Menu Level ►► Select Yes if you are using a Plug and Play capable operating system. Select No if you need the BIOS to configure non-boot devices.
Reset Configuration Data	[Disabled]	
Resources Controlled By	[Auto(ESCD)]	
x IRQ Resources		
PCI/VGA Palette Snoop	[Disabled]	
Assign IRQ For VGA	[Enabled]	
Assign IRQ For USB	[Enabled]	
↑↓←→:Move Enter:Select +/~/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F7:Optimized Defaults		


3.9 PC Health Status

By choosing the PC Health Status, the screen below is displayed. This sample screen contains the manufacturer's default values for the AEC-6840.

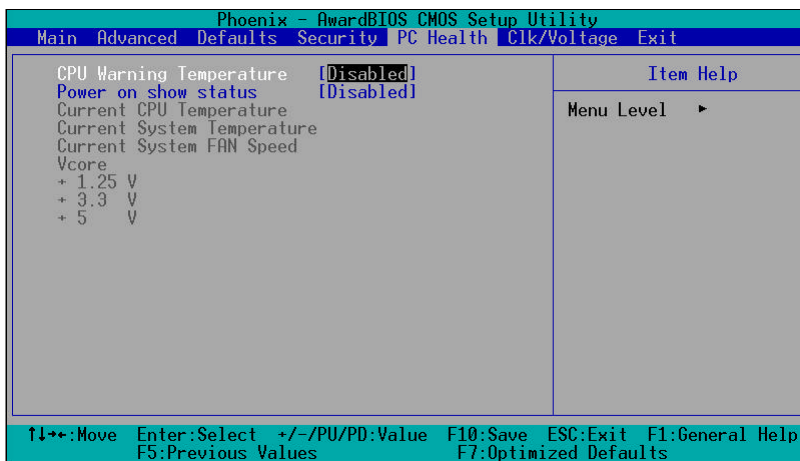

3.10 Clk/Voltage control

By choosing the Clk/Voltage Control, the screen below is displayed. This sample screen contains the manufacturer's default values for the AEC-6840.

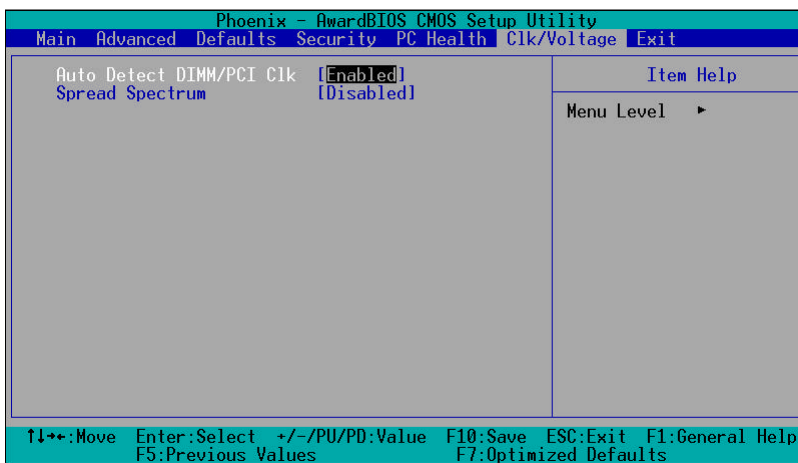


3.11 Load Optimized Defaults

When you press <Enter> on this item you get a confirmation dialog box:

Load Optimized Defaults (Y/N)?


Pressing "Y" loads the default values that are manufacturer's settings for optimal performance system operations.

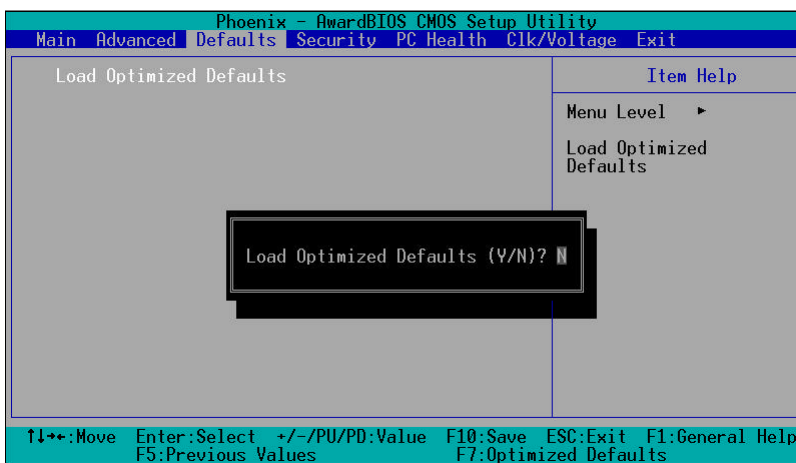

3.12 Set Password


In the Security, there's a function for the users to set up the password. All you need to do is enter the password and then the system will ask you to confirm the password that you've typed to double check. Press ESC key if you want to exit the screen where you have been.

NOTE: To clear the password, simply press Enter when asked to enter a password. Then the password function is disabled.

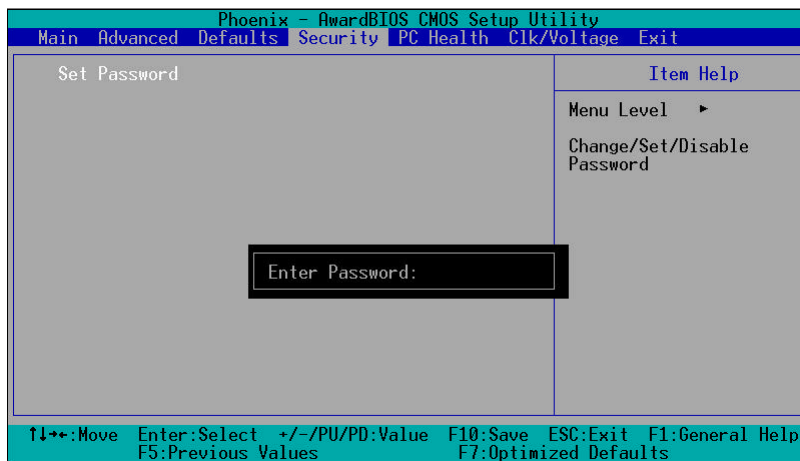


3.13 Save & Exit Setup

If you select this option and press <Enter>, the values entered in the setup utilities will be recorded in the chipset's CMOS memory. The microprocessor will check this every time you turn on your system and compare this to what it finds as it checks the system. This record is required for the system to operate.

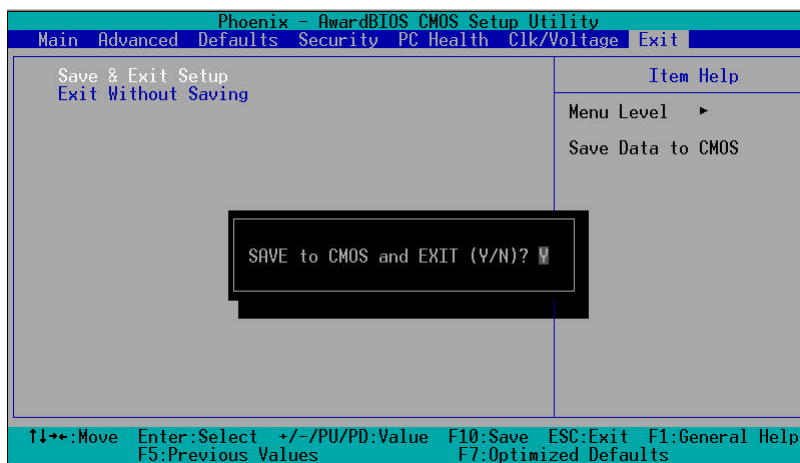

3.14 Exit without saving

Selecting this option and pressing <Enter> allows you to exit the Setup program without recording any new value or changing old one.

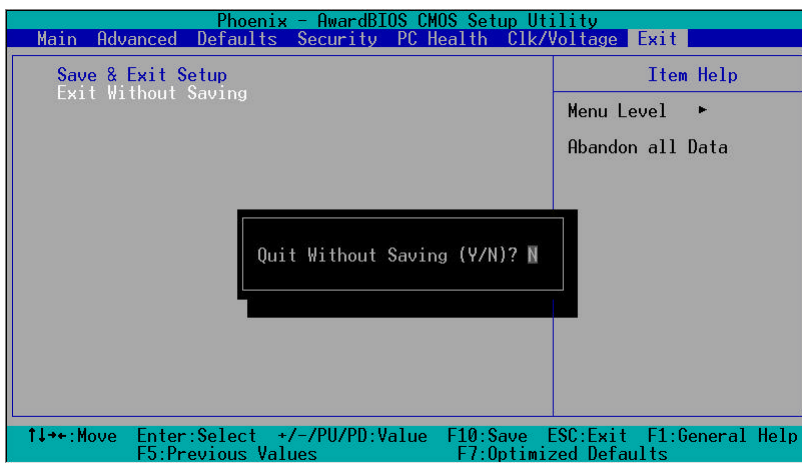

Chapter

4

Driver Installation

The AEC-6840 comes with a CD-ROM that contains all drivers and utilities that meet your needs.

Follow the sequence below to install the drivers:

Step 1 – Install VIA 4 in 1 driver

Step 2 – Install Graphic Driver

Step 3 – Install Audio Driver

Step 4 – Install USB 2.0 Driver

Step 5 – Install Ethernet Driver

USB 2.0 Drivers are available for download using Windows Update for both Windows XP and Windows 2000. For additional information regarding USB 2.0 support in Windows XP and Windows 2000, please visit www.microsoft.com/hwdev/usb/.

The latest step is to install VIA USB 2.0 driver after you complete Windows Service Pack Installation. We recommend you to install VIA USB 2.0 driver due to the compatibility issue.

Please read instructions below for further detailed installations.

Insert the AEC-6840 CD-ROM into the CD-ROM Drive. And install the drivers from Step 1 to Step 5 in order.

4.1 Installation procedure

Step 1

Install VIA 4 in 1 for Windows 98SE/2000/XP

1. Double click on the “.exe” file.
2. Follow the instructions that the window will show you.
3. The system will help you install the driver automatically.

Step 2

Install Graphic Driver for Windows 98SE/2000/XP

1. Click on the “**CLE266_98ME_160108_wlShld_logod**” folder or “**CLE266_XP2K_16943209_wlShld_logod**” folder according to the OS you used and then double click on the setup.exe.
2. Follow the instructions that the window will show you.
3. The system will help you install the driver automatically.
4. Please re-start your computer.

Step 3

Install Audio Driver for Windows 98SE/2000/XP

1. Click on the “**ComboAudio_A1u390a**” folder or “**ALC650 codec driver**” folder and then double click on the “.exe”.
2. Follow the instructions that the window will show you.
3. The system will help you install the driver automatically.

4. Please re-start your computer.

Step 4

Install USB 2.0 Driver for Windows 98SE/2000/XP

Please refer to page 55 remark first

1. Double click on the **setup.exe**.
2. Follow the instructions that the window will show you.
3. The system will help you install the driver automatically.

Step 5

Install Ethernet Driver for Windows 98SE/2000/XP

For Windows 98SE

1. Click on the “**Auto Setup**” folder and then double click on the **setup.exe**.
2. Follow the instructions that the window will show you.
3. The system will help you install the driver automatically.

For Windows 2000/XP

Please follow the steps:

1. **Start** → **Setting** → **Control Panel**
2. **System** → **Hardware** → **Device Manager**
4. **Network Adapter** → **Ethernet Chipset Name**
5. **Driver** → **Update Driver**
6. Follow the wizard and then mark “**Specify a location**” only.
7. Browse the path to

CD-ROM: \ Driver\ Step 5 - Ethernet Driver \ **Manual Setup - W2K**
(For Windows 2000) OR **winxp – rtl8139 (611)** (For Windows XP)

Appendix

A

Programming the Watchdog Timer

A.1 Programming

AEC-6840 utilizes Winbond W83697UF chipset as its watchdog timer controller. Below are the procedures to complete its configuration and the AAEON initial watchdog timer program is also attached based on which you can develop customized program to fit your application.

WatchDog Timer Configuration Registers

Logical Device 8

CRF3---Select WDTO count mode

CRF4---Default 0X00

CRF5—Watch Dog Timer status

CRF3 (PLED mode register. Default 0 x 00)

Bit Reserved

[7:3]:

Bit 2: select WDTO count mode.

0 second

1 minute

CRF4---Default 0X00

Watchdog Timer Time-out value. Writing a non-zero value to this register causes the counter to load the value to watchdog counter and start counting down. Reading this register returns current value in watchdog counter instead of watchdog timer time-out value.

Bit [7:0]: = 0 x 00 Time-out Disable

= 0 x 01 Time-out occurs after 1 second/minute

= 0 x 02 Time-out occurs after 2 second/minutes

= 0 x 03 Time-out occurs after 3 second/minutes

.....

= 0 x FF Time-out occurs after 255 second/minutes

CF5 (Default 0 x 00)

Bit [7]: Reserved.

Bit [6]: invert Watchdog Timer Status

Bit 5: Force Watchdog Timer Time-out, Write only

1 Force Watchdog Timer Time-out event; this bit is self-clearing.

Bit 4: Watchdog Timer Status, R/W

1 Watchdog Timer Time-out occurred.

0 Watchdog Timer counting

.

You can use DEBUG commands to test watchdog function.
 Some examples are listed as below :

-o 4e 87 Enter W83697UF configuration mode

-o 4e 87

-o 4e 07 logic device register

-o 4f 08 logic device number

-o 4e f3 select register CRF3

-i 4f read F1 value

-00 F3 value ; Bit 2=0 ----second

1 ----minute

-o 4e f4 select register CRF4

-i 4f 0a input timeout value, example:10 seconds

Digital IO control process:

The AEC-6840 digital IO interface are controlled by the W83697UF. The GPIO port locates on Logical Device 7. The CRF1 register can read or write the data of digital I/O, and please read the following information for your reference.

F1 register	Digital IO interface
Bit0	Port 1 in
Bit1	Port 2 in
Bit2	Port 3 in
Bit3	Port 4 in
Bit4	Port 5 out
Bit5	Port 6 out
Bit6	Port 7 out
Bit7	Port 8 out

You can try the AEC-6840 digital IO interface with some simple tests using DEBUG commands. Some examples are listed as below:

-o 4e 87 Enter W83697UF configuration mode
-o 4e 87
-o 4e 7 logic device register
-o 4f 7 logic device number
-o 4e f1 select register CRF1

- i 4f read F1 value
- 0f F1 value
- o 4f,1f output "high" to port 5
- o 4f,3f output "high" to port 5 and port 6

- i 4f
- 0e if input port 1 to "low", then you can read data
 become to 0e
- 0d if input port 2 to "low", then you can read data
 become to 0d

Another method: You can setup a base address to digital IO in BIOS, and have four selection : 280h, 290h, 2A0h, 2B0h.

Example:

select 280h

- o 280 1f output "high" to port 5
- o 280 3f output "high" to port 5 and port 6

- i 280
- 0e if input port 1 to "low", and then you can read data
 become to 0e
- 0d if input port 2 to "low", and then you can read data
 become to 0d

A.2 W83697UF Watchdog Timer Initial Program

-----Enter W83697UF configuration mode

```
mov    al,87h    ;Unlock 83697UF register
out    4eh,al
out    4eh,al
```

-----Select Logic device 8(Watch dog device)

```
mov    al,07     ;logic device register
out    4eh,al
mov    al,8       ;logic device 8
out    4fh,al
```

-----Select CRF3 (Set unit to minute or second)

```
mov    al,0f3h
out    4eh,al
in     al,4fh
or     al,11111011b ;bit 2 :0-> second
                        ; :1-> minute
                        ;Select second in this example
```

-----Select CRF4 (Set timeout value)

```
mov    al,0f4h
out    4eh,al
mov    al,0ah    ;10 seconds in this example
                        ;Set this value to 0 disable timeout
out    4fh,al
```

-----Exit configuration mode

```
mov    al,0aah
```

```
out    4eh,al
```